



Maderas Castellar, S.A.

96 396 10 50

www.maderascastellar.net

CARACTERÍSTICAS PANEL TERMOACUSTICO

AGLOMERADO DE 19 Y FRISO DE 10			
ESPESOR	RESISTENCIA TERMICA M2K/W	K W/M2k	PESO KG/m2
69	1436	0,696	19,13
79	1759	0,569	19,43
89	2081	0,481	19,73
99	2404	0,416	20,03
AGLOMERADO DE 10 Y FRISO DE 10			
60	1386	0,722	13,05
70	1709	0,585	13,35
80	2031	0,492	13,65
90	2354	0,425	13,95

AGLOMERADO DE 19 Y TRIPLY OSB DE 10			
ESPESOR	RESISTENCIA TERMICA M2K/W	K W/M2k	PESO KG/m2
69	1436	0,696	20,93
79	1759	0,569	21,23
89	2081	0,481	21,53
99	2404	0,416	21,83
AGLOMERADO DE 10 Y TRIPLY OSB DE 10			
60	1386	0,722	14,85
70	1709	0,585	15,15
80	2031	0,492	15,45
90	2354	0,425	15,75



Av. De la Albufera s/n
Alfatar (Valencia) 46910
info@maderascastellar.net
Fax: 96 396 09 67



Maderas Castellar, S.A.

96 396 10 50

www.maderascastellar.net

AGLOMERADO DE 19 Y CONTRACHAPADO PINO DE 10			
ESPESOR	RESISTENCIA TERMICA M2K/W	K W/M2k	PESO KG/m2
69	1436	0,696	18,35
79	1759	0,569	18,65
89	2081	0,481	18,95
99	2404	0,416	19,25
AGLOMERADO DE 10 Y CONTRACHAPADO PINO DE 10			
60	1386	0,722	12,27
70	1709	0,585	12,57
80	2031	0,492	12,87
90	2354	0,425	13,17

AGLOMERADO DE 19 Y AGLOMERADO DE 19			
ESPESOR	RESISTENCIA TERMICA M2K/W	K W/M2k	PESO KG/m2
78	1502	0,666	26,86
88	1825	0,548	27,16
98	2147	0,466	27,46
108	2470	0,405	27,76
AGLOMERADO DE 19 Y AGLOMERADO DE 10			
69	1452	0,689	20,78
79	1775	0,563	21,08
89	2097	0,477	21,38
99	2420	0,413	21,68
AGLOMERADO DE 10 Y AGLOMERADO DE 10			
60	1402	0,713	14,70
70	1725	0,580	15,00
80	2047	0,489	15,30
90	2370	0,422	15,60



Av. De la Albufera s/n
Alfajar (Valencia) 46910
info@maderascastellar.net
Fax: 96 396 09 67




Maderas Castellar, S.A.

96 396 10 50

www.maderascastellar.net

AGLOMERADO DE 19 Y YESO DE 13			
ESPESOR	RESISTENCIA TERMICA M2K/W	K W/M2k	PESO KG/m2
72	1465	0,689	23,83
82	1788	0,562	24,13
92	2110	0,474	24,43
102	2133	0,409	24,73

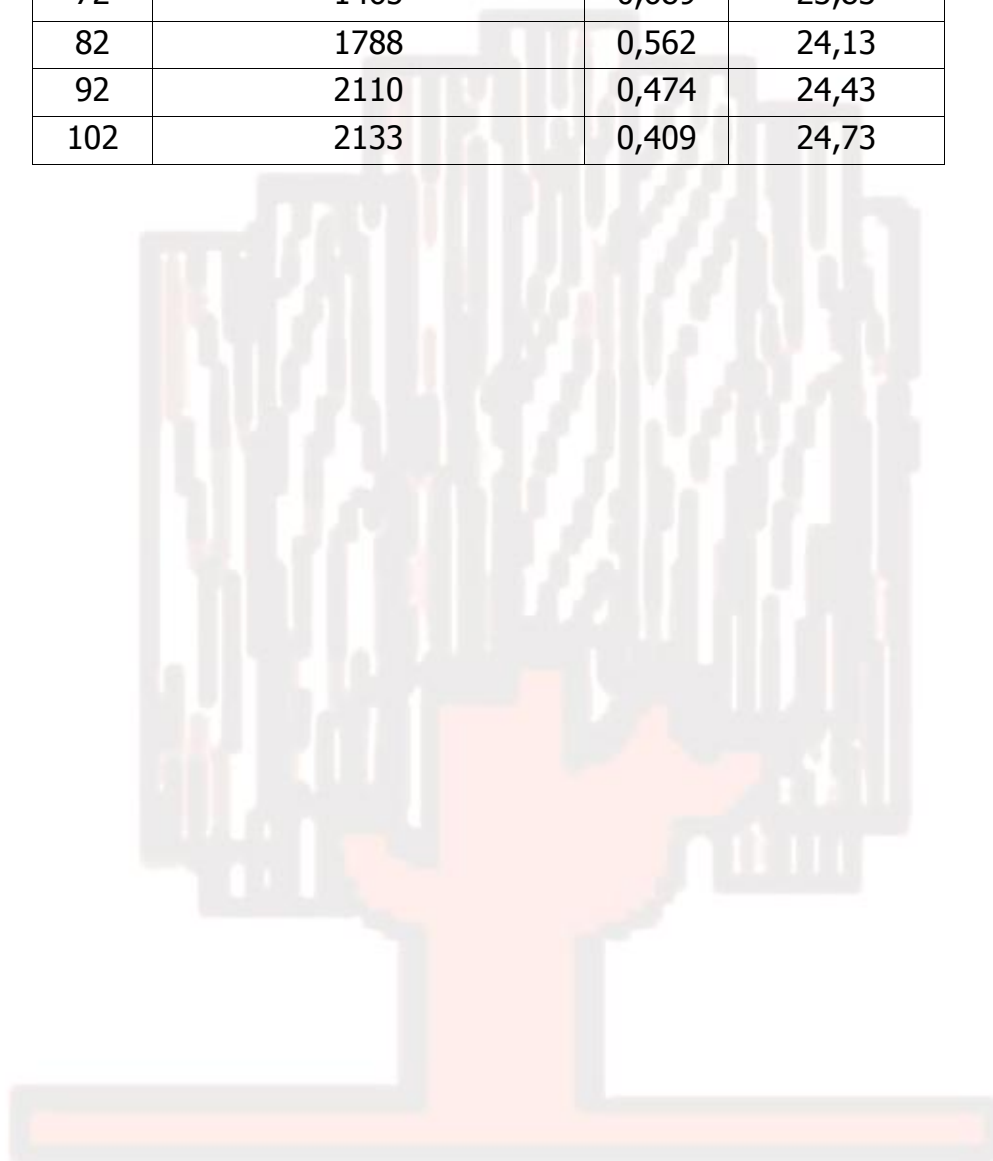

Av. De la Albufera s/n
Alfatar (Valencia) 46910
info@maderascastellar.net
Fax: 96 396 09 67